

Honeywell | Eye Protection



The perfect balance of technology and design.


HONEYWELL AVATAR

The perfect balance of technology and design in 12 innovative features.

Designed with the worker in mind, our unique technology allows for eight points of adjustability in this customizable, stylish eyewear.

They'll think you had these made just for them, and you'll know your worker are safe

- 01 - HydroShield Coating
- 02 - 9 Base Lens
- 03 - Floating Nose Loop
- 04 - Flexible Nose Pads
- 05 - Soft Brow Frame – **MMT+**
- 06 - Indirect Venting System
- 07 - Angle-Adjustable Ratchet Temple
- 08 - Flexible Temples – **MMT+**
- 09 - Soft Temples & Nose Pads – **MMT+**
- 10 - Wire-Core Temples
- 11 - Wrap Around Temples & Soft Tip Pads – **MMT+**
- 12 - Ultra-Light Frame

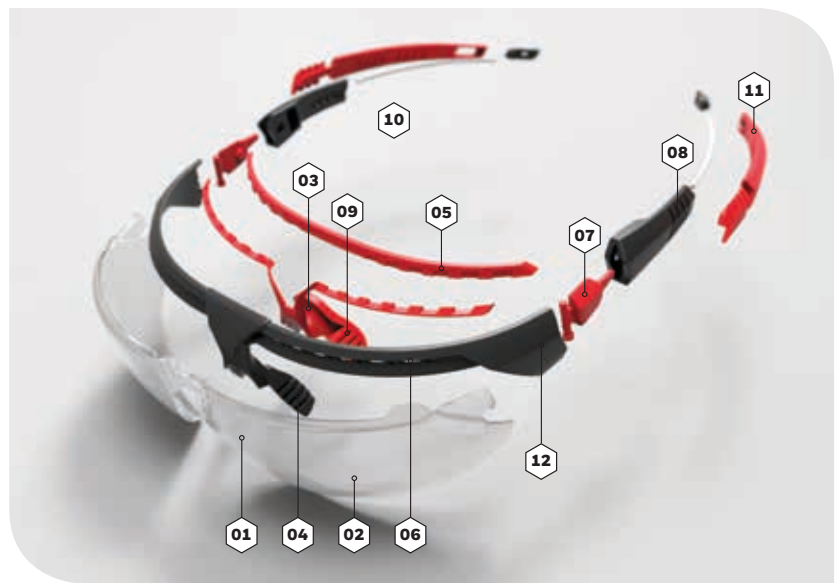

Honeywell HydroShield® Anti-Fog Coating



The dual action HydroShield anti-fog lens coating provides **more than 20X longer lasting fog-free performance** – even after extended wear and repeated cleanings – and provides **2X greater scratch-resistance*** than the current anti-fog coating.

- Permanently bonded to the lens
- Exceed 180 seconds of total fog free time
- No application
- No maintenance

*Comparative lens life test performed using a Bayer Abrasion Test method and may vary between environment and application.

RISKS

- General use and protection against impact (45m/s) – special protection against fogging

APPLICATIONS

- Suitable for all environments where fogging occurs, that is widely across industries – from construction, manufacturing, chemical, and utilities, to oil and gas – and across applications

Honeywell Avatar Specifications



Technical Datas	
Range	Spectacles
Lens Material	Polycarbonate
Frame Material	TPE
Frame color	Red & Black and Black
Lens Coating	Honeywell Hydrosshield and Hard-Coat
Weight	33 grams per eyewear
Certifications	EC Certificate Number 3053 - Standard(s): EN166:2001 - EC
Category PPE	2 - Quality Assurance : ISO 9001 / 2000
Delivery Information Selling units	8 units per box , 80 units per case

Ref.	Description	Lens	Coating	Frame Marking	Lens Marking
1034831	Honeywell Avatar Black / HydroShield coating/ Clear lens	○ Clear	HydroShield	HON 166F	2C-1.2 HON 1F KN
1034832	Honeywell Avatar Black / HydroShield coating/ Grey lens	● Grey	HydroShield	HON 166F	5-3.1 HON 1F KN
1034833	Honeywell Avatar Black / HydroShield coating/ Amber lens	● Amber	HydroShield	HON 166F	2C-1.2 HON 1F KN
1034834	Honeywell Avatar Black / Hard Coating/ I/O lens	I/O	Hard Coat	HON 166F	5-1.7 HON 1F
1034835	Honeywell Avatar Black / Hard Coating/ Blue mirror lens	Blue Mirror	Hard Coat	HON 166F	5-3.1 HON 1F
1034836	Honeywell Avatar Black&Red / HydroShield coating/ Clear lens	○ Clear	HydroShield	HON 166F	2C-1.2 HON 1F KN
1034837	Honeywell Avatar Black&Red / HydroShield coating/ Grey lens	● Grey	HydroShield	HON 166F	5-3.1 HON 1F KN
1034838	Honeywell Avatar Black&Red / Hard Coating/ I/O lens	I/O	Hard Coat	HON 166F	5-1.7 HON 1F

Lens markings

Optical class 1:

no optical distortion
(permanent wear authorised)

Mechanical resistance

F: impact: 45 m/s

T: resistance guaranteed between -5 and 55°C

K: Resistance to surface damage by fine particles

N: Resistance to fogging

Filter performance and area of application

Code (area of application)

2 : UV filter

5 : sunlight filter

Colour perception:

C: colour perception unchanged

Safety class:

1.2 to 6: level of filtering of visible light

HONEYWELL SAFETY PRODUCTS

UNITED KINGDOM

Honeywell Safety Products Uk Ltd

Edison Rd
Basingstoke RG21 6QD
United Kingdom
Phone: +44 (0) 1256 693 200
Fax: +44 (0) 1256 693 300
Email: info-uk.hsp@honeywell.com

INTERNATIONAL

Honeywell Safety Products Europe SAS

Immeuble Edison Paris Nord 2
33, rue des Vanesses – CS 55288 Villepinte
95958 Roissy CDG Cedex – France
Phone: +33 (0)1 49 90 79 79
Fax: +33 (0)1 49 90 71 04
Email: info-export.hsp@honeywell.com

www.honeywellsafety.com

FOR TECHNICAL QUESTIONS

INDUSTRIAL SAFETY PPE TECHNICAL SUPPORT

Free Phone: 00 800 3344 2803 (free calls in Europe)
Phone: +44 (0) 1698 647 087 (paid calls)
Email: IS.PPE.TECHSUPPORT.EUROPE@honeywell.com

07-18-560 GB - 10/2018
©2018 Honeywell International Inc.

Honeywell
THE POWER OF **CONNECTED**